




All Digital Fiber Optic Manufacturing Specialists

Installation and Operation Manual

FTD110DB Series



8-bit Digital Series

1-ch Video with 1 Bi-directional Data

Fiber Optic Converter

Models covered in this manual

Single-Mode Transmitters

FTD110DB-SST

FTD110DB-SSTL

Single-Mode Receivers

FTD110DB-SSR

FTD110DB-SSRL

Multi-Mode Transmitter

FTD110DB-SMR

Multi-Mode Receiver

FTD110DB-SMR

Compatible with the following Series:

FTD110DBM

FTD110DBMicro

FTD110DB-XXR3

Remark:

If the optical connector is FC type, the suffix in the model number will be “-*FXX*”. Eg.

FTD110DB-FST

Table of Contents

(1)	SAFETY INSTRUCTIONS	2
(2)	PRODUCT OVERVIEW	3
	2.1 Introduction.....	3
	2.2 Models selection table	4
(3)	INSTALLATION.....	5
	3.1 General.....	5
	3.2 Card module installation	5
(4)	CABLE CONNECTIONS & SETUP PROCEDURES	6
	4.1 System cable connections.....	6
	4.2 Data port assignment and pin connections.....	6
	4.3 Dip switch setting procedures.....	8
(5)	OPERATIONAL GUIDES.....	10
	5.1 FTD110DB Series Transmitter	10
	5.2 FTD110DB Series Receiver	10
(6)	SPECIFICATIONS	11
(7)	WARRANTY INFORMATION.....	12
(8)	CONTACT INFORMATION.....	12

(1) Safety Instructions

Please be familiar with all information in this manual prior to installation and operation.

Note 1: The products described each contains a Class 1 laser or LED fiber optic emitter. The following safety precautions apply.

Warning: Do not disconnect the fiber optic connector while the unit is powered up. Exposure to Class I invisible optical radiation is possible when the internal fiber optic connector is disconnected while the unit is powered up.

Caution: Any access to the controls, adjustments, or performing operations, which are other than those facilitated and/or specified may result in hazardous radiation exposure. Permanent eye damage or other bodily injuries may be resulted from such exposure even for only seconds.

Note 2: This assembly contains parts sensitive to damage by electrostatic discharge (ESD). ESD precautionary procedures should be applied in the course of touching, removing or inserting parts or assemblies.

(2) Product Overview

2.1 Introduction

The FTD110DB Series products comprise of either a single-mode or multi-mode fiber optic transmitters and receivers catering for optical transmission of ONE forward (Tx → Rx) video and ONE bi-directional (Tx ↔ Rx) data signal in one fiber. The products work at wavelengths 1310nm and 1550nm with either a 9/125um or 62.5/125um fiber for single-mode or multi-mode transmission respectively.

A non-compressed 8-bit digital video transmission scheme is implemented which supports multi-systems video in NTSC, PAL and SECAM formats. Transparent data transmission is also accomplished in RS232, RS422 and RS485 formats regardless of the types of communication protocol implemented within the system. Time Division Multiplex (TDM) technique is employed for digital transmission of forward video and data; whereas optical Wavelength Division Multiplex (WDM) technique is employed for simultaneous reverse data transmission so as bi-directional data transmission is accomplished. For the single-mode transmission, we also offer specifically designed products for long-haul transmissions up to 60km. Their model names include a letter “L” in the suffix, e.g. FTD110DB-SSTL for Tx, FTD110DB-SSRL for Rx, etc.

The FTD110DB Series units are also available as plug-in cards installed in 19” rack-mount chassis deployed in small, medium to large systems. Each plug-in card occupies one slot space inside the rack-mount chassis. The rack mount chassis has to be ordered separately which is integrated with a power supply unit for powering the installed card modules.

2.2 Models selection table

Mode	Models ¹	Descriptions	Installation requirements	Remarks
Single-Mode	FTD110DB-SST	Single-mode Video Transmitter & Data Transceiver Card Module	Housed in FT-C18 chassis ²	FT-C18 chassis has to be ordered separately
	FTD110DB-SSTL	Single-mode Long-haul Video Transmitter & Data Transceiver Card Module		
	FTD110DB-SSR	Single-mode Video Receiver & Data Transceiver Card Module		
	FTD110DB-SSRL	Single-mode Long-haul Video Receiver & Data Transceiver Card Module		
Multi-Mode	FTD110DB-SMT	Multi-mode Video Transmitter & Data Transceiver Card Module		
	FTD110DB-SMR	Multi-mode Video Receiver & Data Transceiver Card Module		

¹ If the optical connector is FC type, the suffix in the model number will be “-FXX”. Eg. FTD110DB-FST

² Refer to FT-C18 product manual for specifications

(3) Installation

3.1 General

All OT Systems products are thoroughly inspected, tested and securely packed before delivery to ensure a stable, intact and trouble-free service. Please check the equipment upon receipt for any visible damage which may have been caused during transit.

The FTD110DB Series card modules are housed inside the FT-C18 rack-mount chassis (Fig. 3.1) with an included power supply unit. The whole chassis is powered by a local residential power supply outlet. FT-C18 is a standard 19" (483mm) rack-mount chassis which occupies 4 rack units space (177.8mm) in height. Each FTD110DB card module occupies one slot space inside and a total of 18 cards can be housed inside the chassis.



Fig. 3.1 FT-C18 chassis

3.2 Card module installation


- a) Insert the card module into the FT-C18 chassis along the top and bottom card guides of an empty slot and push the card into the multi-pin socket at the rear firmly.
- b) Repeat the above procedure for all the rest card modules. Unused slots must be covered with blank panels (provided separately).
- c) Once the chassis is powered up, check that the red POWER LED on the front and back panels of the card modules are lit. If not, check the power supply cable connections between the chassis and the power supply socket. For failures of individual card's POWER LEDs, check the corresponding card modules whether they have been inserted properly.
- d) Connect all the signal inputs and outputs at the back of the unit with appropriate cables: fiber optic cable for optical link, BNC cable for video input/output (Tx/Rx), and UTP cable for data input/output (Tx/Rx).
- e) With all the signals available at the input and output ports, check the status of LEDs located on the unit. With correct status of each LED, installation is now completed [for LEDs status, see **Operational Guides** on this manual's section (5)].

(4) Cable Connections & Setup Procedures

4.1 System cable connections

Signal Type	Cable Type	Connector
Optical	Single-mode or Multi-mode fiber	ST (or FC) Connector
Video	Coaxial Video Cable	BNC Connector
Data	Twisted-pair Cable	Screw Terminal Block

Typical System Cable Connections Diagram:

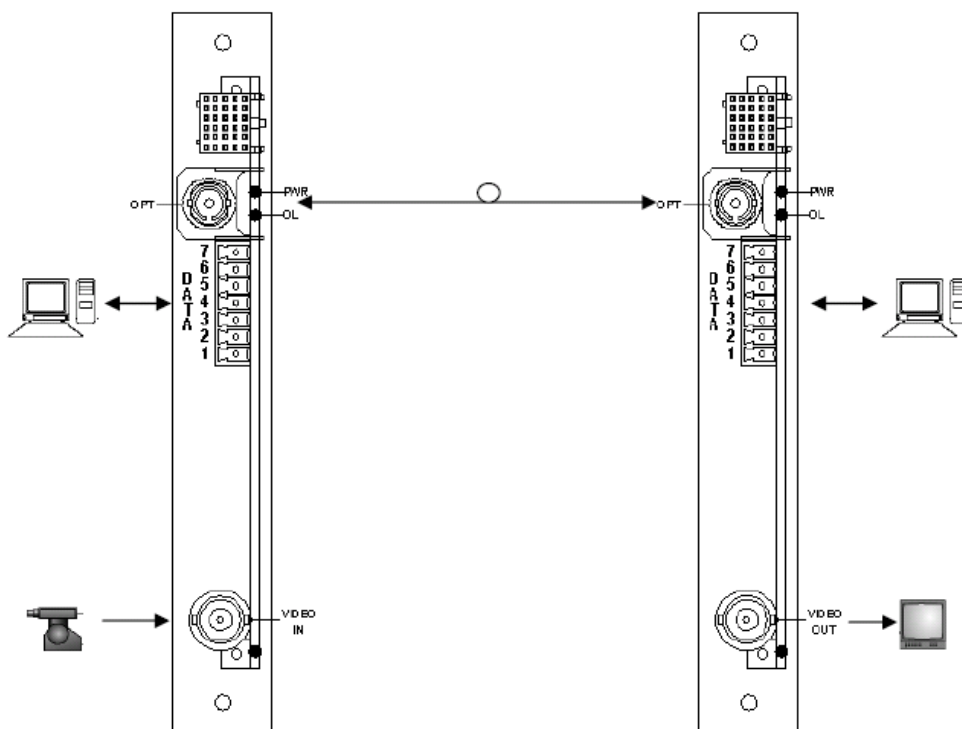

Card Module Transmitter

Card Module Receiver

Fig 4.1 Card Module to Card Module connection diagram

4.2 Data port assignment and pin connections

For data input and output connections, please note the following pin assignment:

Pin Assignment (Screw Terminal Block)	1	2	3	4	5	6	7
Data format							
RS422/485 (4-Wire)	IN(+)	IN(-)	OUT(+)	OUT(-)	N/A	N/A	N/A
RS485 (2-Wire)	IN/OUT (+)	IN/OUT (-)	N/A	N/A	N/A	N/A	N/A
RS232	N/A	N/A	N/A	N/A	IN	OUT	Sig. COM

4-Wire RS422/485 Full Duplex Data communication connection diagram:

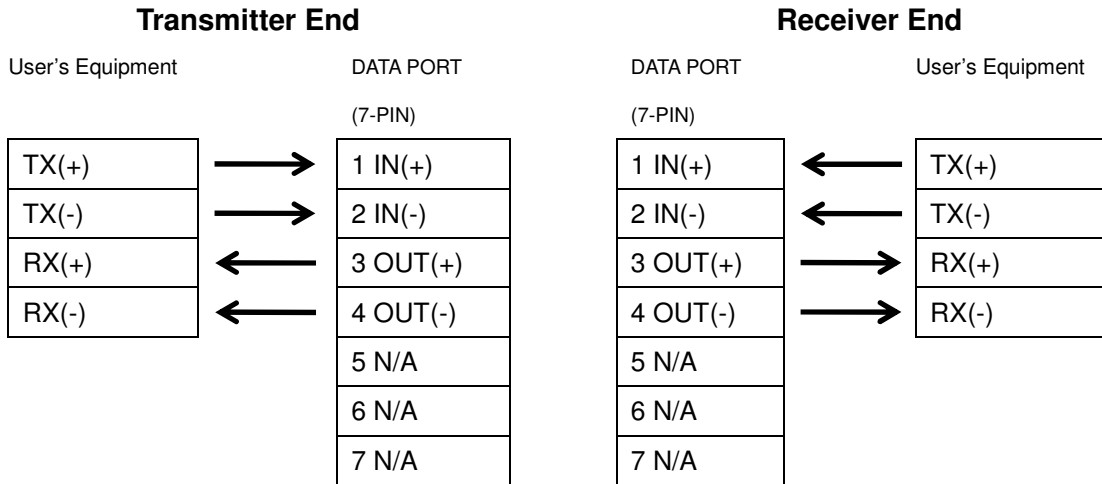


Fig. 4.4.1 Connector Pin Assignments for 4-wire RS422/485 data format at Data port

2-Wire RS485 Half Duplex Data communication connection diagram:

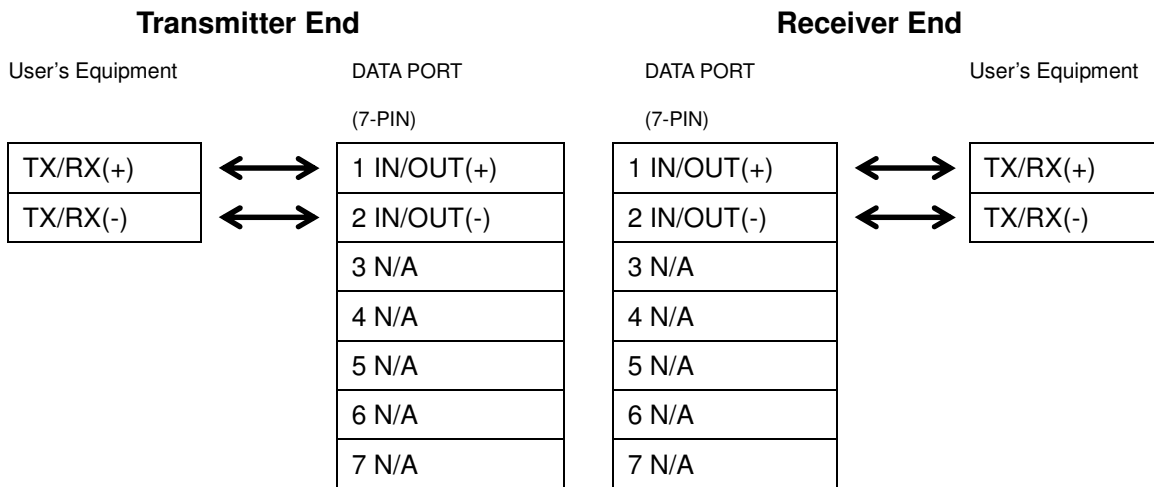


Fig. 4.4.2 Connector Pin Assignments for 2-wire RS485 data format at Data port.

RS232 Data communication connection diagram:

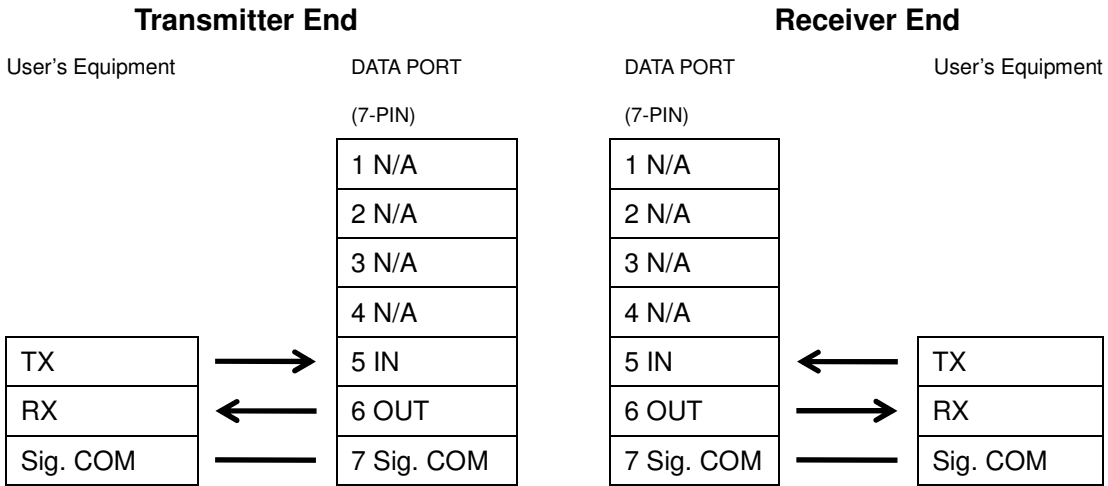


Fig. 4.4.3 Connector Pin Assignments for RS232 data format at Data port

4.3 Dip switch setting procedures

The only setup procedure is to select the appropriate line terminations and data transmission formats. Selections must be made by setting the dip switches (Fig. 4.5) through the access on the front panel.

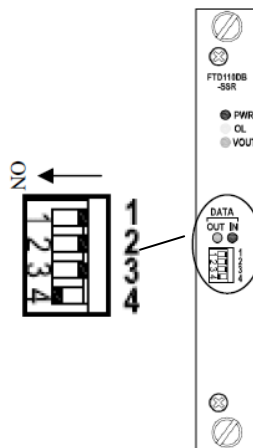


Fig. 4.5 Location of Dip Switches

Dip switch settings for various types of data transmissions

Function / Switch No.	Sw. 3	Sw. 4
RS485 (2-Wire)	OFF	OFF
RS422/485 (4-Wire)*	OFF	ON
RS232	ON	OFF

* Factory setting [RS422/485 (4-Wire)]

Dip switch settings for line terminations

Line Output Termination

Function / Switch No.	Sw. 1
Line Output Terminated	ON
Line Output Unterminated*	OFF

Line Input Termination

Function / Switch No.	Sw. 2
Line Input Terminated	ON
Line Input Unterminated*	OFF

* **Factory setting (Line Output and Line Input "Unterminated")**

Industrial practice for line terminations

For RS422 4-wire communication, it is suggested to keep the input and output lines terminated in the ONE Tx to ONE Rx configuration.

For RS485 2/4-wire communication, the RS485 devices can be disabled to stay on Hi-Z state. It is very important that the data lines have to be terminated with a resistor being connected across the pair wires so as to eliminate the residual standing signal waves on the lines in the Hi-Z line condition. So, it is recommended that the lines should be terminated with the appropriate resistance. For more than one RS485 devices are connected in a daisy-chain configuration, only the farthest device of the loop, i.e. the device located at the end of the lines, should be terminated; whereas the middles ones are set to "Unterminated" status. See the figure 4.6 below for reference.

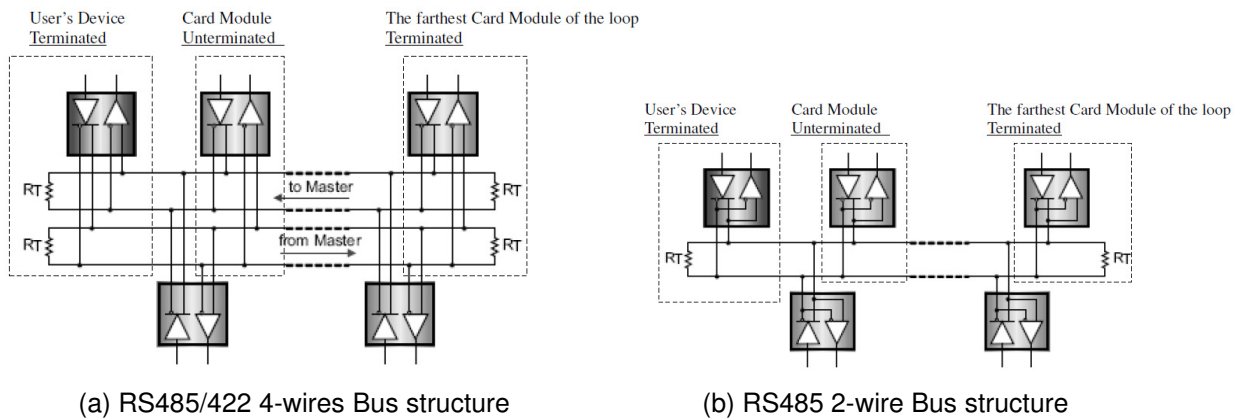


Fig. 4.6 Termination of different Bus structures

(5) Operational Guides

5.1 FTD110DB Series Transmitter

LED Indicators

Indicator		Color	Description
PWR		Red	Lit when power is supplied to the Transmitter.
OL		Yellow	Lit when optical signal from receiver to transmitter is active.
VIN		Green	Lit when video signal is fed into the VIDEO IN connector.
DATA	IN	Red	Blinks when input data is available at Tx.
	OUT	Green	Blinks when output data is available at Tx.

Signal Ports

OPT -	ST (or FC) Optical Connector for fiber cable connection.
DATA -	7-pin Screw Terminal Block for data signal.
VIDEO IN -	BNC Video Connector for video signal input.

5.2 FTD110DB Series Receiver

LED Indicators

Indicator		Color	Description
PWR		Red	Lit when power is supplied to the Receiver.
OL		Yellow	Lit when optical signal from transmitter to receiver is active.
VOUT		Green	Lit when video signal is available at the VIDEO OUT connector.
DATA	IN	Red	Blinks when input data is available at Rx.
	OUT	Green	Blinks when output data is available at Rx.

Signal Ports

OPT -	ST (or FC) Optical Connector for fiber cable connection.
DATA -	7-pin Screw Terminal Block for data signal.
VIDEO OUT -	BNC Video Connector for video signal output.

(6) Specifications

PARAMETERS \ MODELS*	FTD110DB-SST(R) (Single-Mode)	FTD110DB-SST(R)L (Single-Mode)	FTD110DB-SMT(R) (Multi-Mode)
OPTICAL			
No. of Fiber / Connector	1 / ST(or FC)	1 / ST(or FC)	1 / ST(or FC)
Wavelength	1310/1550 nm	1550/1310 nm	1310/1550 nm
Optical Power Budget	17 dB	24 dB	23 dB
Max Distance	40 km	60 km	4 km
ELECTRICAL VIDEO			
Channel / Connector	1 / BNC		
System	PAL, NTSC, SECAM		
Bandwidth	6.5 MHz		
Input/Output Impedance	75 Ohm		
Input/Output Level	1.0 Vp-p typical		
Differential Gain	< 1% typical		
Differential Phase	< 1° typical		
SNR	>60dB		
DATA			
Channel / Connector	1 / 7-pin Screw Terminal		
Direction	Bi-directional (Duplex)		
Electrical Format	RS232, RS422, RS485 (2-wire, 4-wire)		
Transmission Rate	0~256 Kbps		
POWER			
Power consumption	12VDC @ 3.6W		
Supplies	Powered by FT-C18 chassis		
Connector (Mini unit)	2-pin Screw Terminal		
PHYSICAL			
Weight	0.16 kg		
Dimensions (W x H x D)	148 x 20.4 x 213 mm (MAX)		
ENVIRONMENTAL			
Operating Temperature	-40°C ~ +75°C		
Storage Temperature	-40°C ~ +85°C		
Relative Humidity	0 ~ 95% non-condensing		
MTBF	>100'000 Hours		

* If the optical connector is FC type, the suffix in the model number will be "-FXX". Eg. FTD110DB-FST

(7) Warranty Information

All OT Systems products are subject to limited life-time warranty offered by the company in normal circumstances. Please refer to the OT Systems Products Warranty Statement for details. Access to the statement is available in our company website at www.ot-systems.com.

(8) Contact Information

OT Systems Ltd. (Hong Kong)

Unit 1023, 10/F Landmark North
39 Lung Sum Avenue
Sheung Shui, N.T., Hong Kong
Tel. +852 2672 5153
Fax. +852 2679 0756
sales@ot-systems.com

OT Systems Ltd. (USA)

River Heights Business Park
5375 US Highway 34
Oswego, IL 60543, USA
Tel. +1 630 554 9178
Fax. +1 630 554 9179
sales.usa@ot-systems.com