

D SERIES video signal distributors

D2X14

Programmable video signal distributor
2 IN / 8 OUT



D2X14R

Programmable video signal distributor
2 IN / 8 OUT, 19" rack 1HE



D4X12R

Programmable video signal distributor
4 IN / 8 OUT, 19" rack 1HE



tekno system[®]
Italian design for CCTV since 1979

Tekno System S.p.A.
Via Rostoncello, 1 - 36010 Carrè - Italy
Phone: +39 0445 314324 | Fax: +39 0445 314319
Email: info@tekno-system.eu | Web: www.tekno-system.eu

rev. 250112

Page 1 / 2


D SERIES video signal distributors

The video signal distributor is an essential part of any CCTV surveillance installation. This component enables a camera's video signal to be distributed to several control and/or switching stations without losing in quality.


The **D2X14** unit is a dual distributor with 1 input / 4 outputs having a deviator, easily accessible on the back panel, that offers a selection of different configurations to best suit the CCTV installation requirements. It is also available for assembly on a 19" 1HE rack (D2X14R)

The **D4X12R** model is a quadruple distributor with 1 input / 2 outputs, without giving up on versatility of the previous products, it also provides gain adjustment on each individual video output by turning easily accessible trimmers. The case is for 19" rack 1HE.


D2X14 – Front view

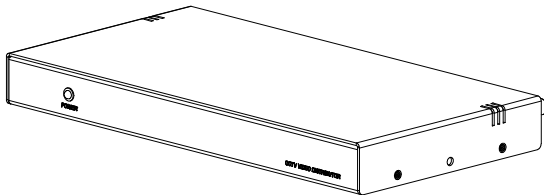


D2X14 – Rear view




D2X14R / D4X12R – Rear view

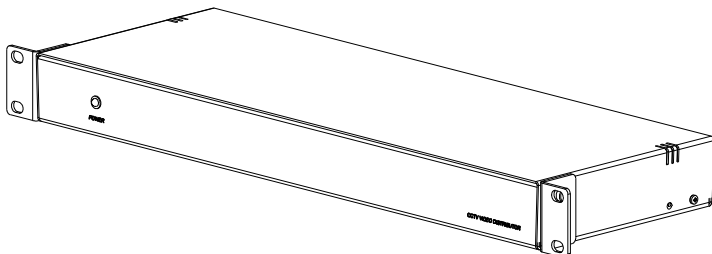

D2X14R – Rear view



D4X12R – Rear view



TECHNICAL FEATURES

Video:

Input signal: 1Vpp/75 Ω PAL / NTSC
Inputs: 2 (D2X14-D2X14R)
4 (D4X12R)
Outputs: 8
Video connectors: BNC
Input impedance: 75 Ω
Output impedance: 75 Ω
Video signal gain: 0 dB (D2X14-D2X14R)
+/- 6dB (D4X12R)
Passband: >10 MHz (-3 dB)

Electrical:

PSU input voltage: 100-240 V~/47-63Hz
PSU output voltage: 12V=
Power: 15 W

Mechanical:

Operating temperature range: 0°C / +40°C
(32°F-104°F)
Field of application: indoor
Dimensions (WxHxD):
D2X14 294x32x174 mm
D2X12R Rack 19" 1HE
D4X12 Rack 19" 1HE
Weight (net, PSU excluded):
D2X14 1,55 Kg
D2X14R 2,40 Kg
D4X12R 2,50 Kg

Standard kit:

- Power supply unit
- Mains power cable
- Instruction manual
- Rack brackets (D2X12R and D4X12R only)

Technical data and product features might be modified without any warning.