



## VKC-1395/12-24

Article number: 210385

1/3" Camera, Day&Night, WDR, 2D-/3D-DNR, DSS, DIS, 750 TVL, RS-485, 12V/24V

### Mainfeatures

1/3" Sony Effio-V double scan (960H)

Scene Select function, Analytic function

WDR (wide dynamic range)

High speed shutter control (ESC/MES)

Automatic white balance (AWB)

Supply voltage: 12VDC or 24VAC

Colour/b&w selection

Digital noise reduction (DNR)

Switchable automatic gain control (AGC)

Adjustable backlight compensation

Privacy masking/Mirror function

CS/C mount

### Specifications

Sensor size	1/3"
Imager	CCD
Imager	High density double scan Sony EffioV (960H)
System	True Day&Night
Sensitivity	0,1 Lux
Sensitivity	(colour) 0,01Lux
Low speed shutter	yes
Low speed shutter	2x~256x
Wide Dynamic Range (WDR)	WDR, D-WDR
Flickerless function	yes
Backlight compensation	BLC, HLC
IR cut filter	switchable




**VKC-1395/12-24**

## Specifications continued

Automatic electronic shutter (ESC)	1/50 ~ 1/10,000sec.
Automatic gain control (AGC)	ON/OFF switchable
White balance	ATW, push, user defined
Signal-to-noise ratio	-50 db
Video standard	PAL
Synchronization	internal
Lens mount	CS/C mount
Digital zoom	yes
Iris control	DC, manual
Active picture elements	976(H) x 582(V) pixels
Horizontal resolution	750 TVL
Motion detector	yes
Menu languages	English, German, Spanish, Russian, Portugese, French, Japanese
Privacy zones masking	15 zones masking, ON/OFF switchable
Mirror function	V flip, H-flip, H/V flip
Digital Noise Reduction (DNR)	2D-DNR, 3D-DNR
Digital Noise Reduction (DNR)	yes
Video outputs	composite (CVBS)
Video outputs	1Vp-p (C)VBS, 75ohms, BNC
External connections	video (BNC), voltage input, RS-485, external day&night switching, alarm output TTL, open collector
Alarm inputs	no
Alarm outputs	1
Serial interfaces	RS-485
Serial interfaces protocols	Pelco D
Dimensions (HxWxD)	56x67,5x124
Illumination	no
Colour	Pantone 877C, Side wings: Pantone Cool Gray 11C
Housing	indoor
Weight	270g
Power consumption	2.5W
Protection rating	n/a
Supply voltage	12VDC, 24VAC
Temperature range (operation)	-10°C ~ +50°C
Certificates	CE
Parts supplied	manual, C/CS adapter, 4-pin lens plug, C mount ring


## VKC-1395/12-24

### Available Accessories

Bild	Art. Nr. / Bezeichnung	Beschreibung
	70771 / WD-23	Wall Mount Bracket with Ball Joint, 1/4" Camera Fixing Screw, Pantone 877
	43274 / F03Z2.6DC-NFSHR	F1.0/3-8mm DC Lens, Varifocal, No Focus Shift, High Resolution, 1/3" CS Mount
	79488 / VTL-WWA	Weatherproof Housing (300mm) with Heater Thermostat, Wallbracket, RAL9002, 230V

# VKC-1395/12-24

## Technical Drawing

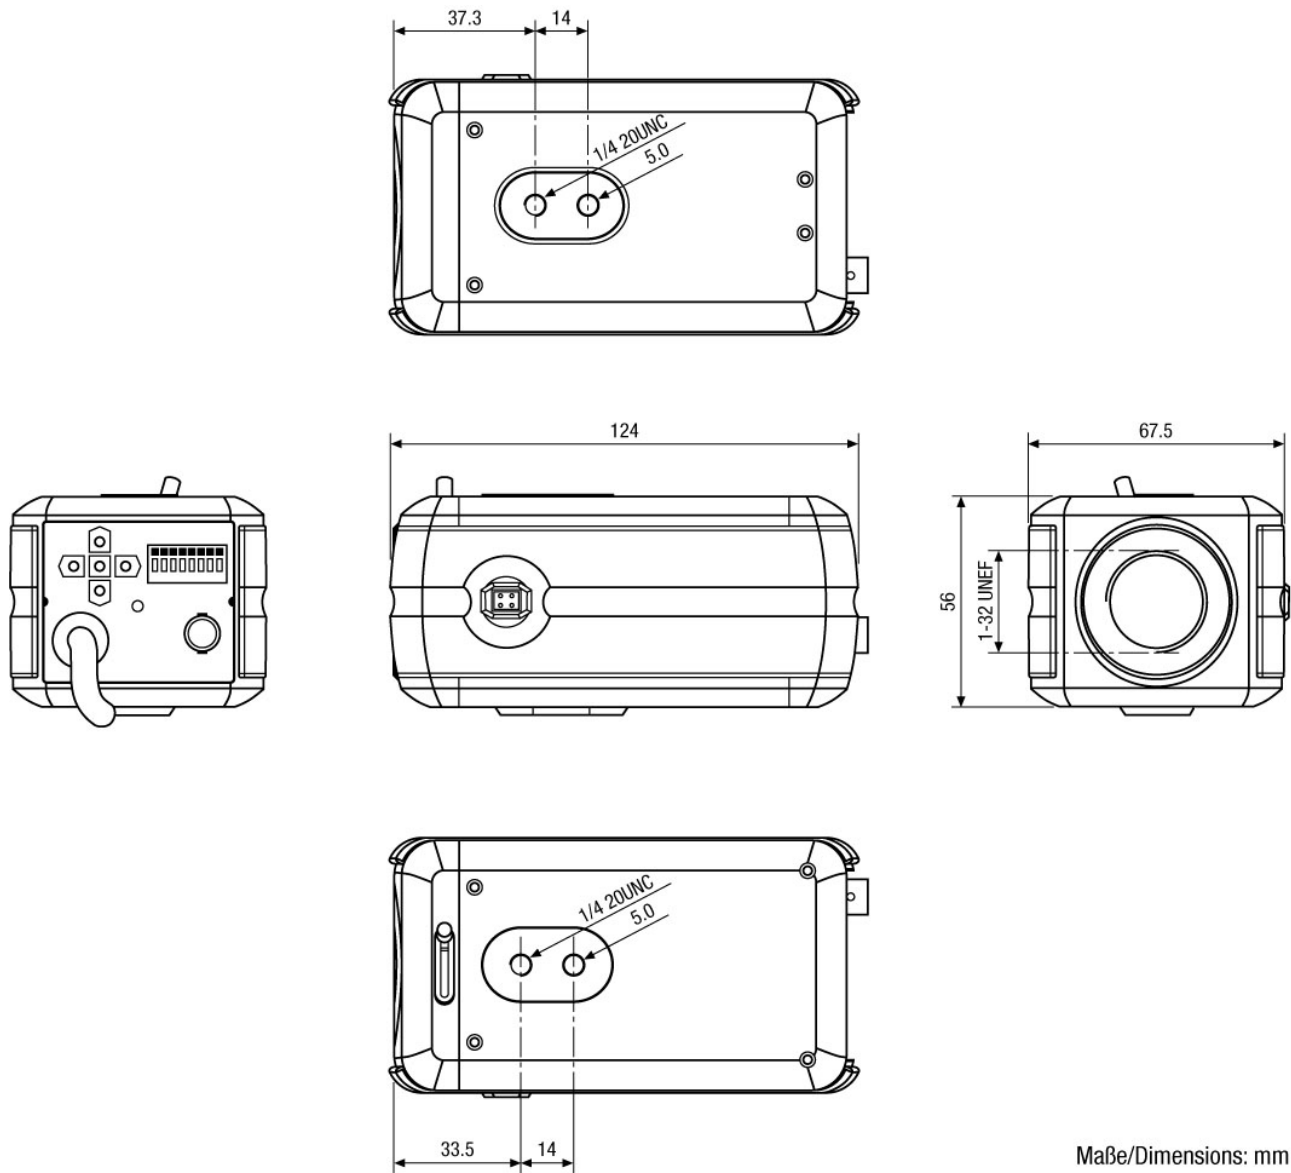

Maße/Dimensions: mm

## Your Contact Person



eneo is a registered trademark of  
VIDEOR E. Hartig GmbH  
Carl-Zeiss-Straße 8  
63322 Rödermark  
Deutschland  
Tel.: +49 6074-888-333  
E-Mail: info@eneo-security.com  
Web: www.eneo-security.com