



HDD-2030PTZ1080

Article number: 211100

1/2.8" HD-SDI Dome, PTZ, 30x, Day&Night,
4.3~129mm, 1920x1080, Indoor

Mainfeatures

1/2.8" HDcctv PTZ dome with Sony CMOS-Sensor

Full HD 1920x1080 pixel, real-time

Digital noise reduction (DNR)

Wide Dynamic Range (D-WDR)

Alarm in- and outputs

30x AF-lens, 4.3~129mm

HD-SDI videooutput

Backlight compensation (BLC)

Privacy zones, defog function

Specifications

Sensor size	1/2.8"
Imager	CMOS
Imager	Sony Exmor
System	True Day&Night
Sensitivity	0,5 Lux
Sensitivity	(Colour) 0,1Lux (BW)
Low speed shutter	yes
Low speed shutter	2x ~ 6x
Manual electronic shutter (MES)	1/5 ~ 1/10.000sec.
Wide Dynamic Range (WDR)	D-WDR
Flickerless function	yes
Backlight compensation	BLC
IR cut filter	switchable
Automatic electronic shutter (ESC)	1/5 ~ 1/10.000sec.

HDD-2030PTZ1080

Specifications continued






White balance	WAWB, automatic, manual, indoor, outdoor, fluorescent, Sodium lamp
Signal-to-noise ratio	50dB
Frame rate	1080 @ 50/60p, 1080 @ 25/30p, 1080 @ 50/60i, 720 @ 50/60p
Lens type	auto focus zoom
Zoom factor	30x
Focal length	4,3 - 129,0 mm
Aperture range (F)	F1,6~F5,0
Horizontal angle of view	65,1 - 2,23 °
Motion detector	no
Presets	240 presets
Auto calibration	yes
Tilt range	-10°~190°
Rotation range	360 °
Speed (manual control)	0,1-380 °/Sek.
Preset speed	380 °/Sek.
Menu languages	English
Mirror function	H/V flip
Digital Noise Reduction (DNR)	2D-DNR, 3D-DNR
Digital Noise Reduction (DNR)	yes
Video outputs	HD-SDI (BNC)
External connections	alarm input/output, HD-Signal BNC output, voltage input
Alarm inputs	4
Alarm outputs	2
Serial interfaces	RS-485
Serial interfaces protocols	Pelco D, Fastrax IIE
Series	eneo Fastrax
Dimensions (HxWxD)	198,9x125mm
Illumination	no
Colour (housing)	black
Housing	indoor
Housing material	plastic
Weight	1.3kg
Heater	no
Power consumption	12W
Blower	no
Mounting	ceiling mount
Protection rating	-
Supply voltage	12VDC, 24VAC
Temperature range (operation)	0°C ~ +50°C
Text display	ON/OFF switchable
Vandalism resistant	no
Certificates	CE
Parts supplied	manual, mounting plate

HDD-2030PTZ1080

Specifications continued


HDD-2030PTZ1080

Available Accessories

Bild	Art. Nr. / Bezeichnung	Beschreibung
	74130 / EDC-OPC-2/24V	Pendant Mount Outdoor Dome Housing, Sun Shield, Clear Bubble 6.5", 24VAC
	74135 / EDC-IPC-2/24V	Pendant Mount Indoor Dome Housing with Clear Bubble 6.5", 24VAC
	74136 / EDC-OPS-2/24V	Pendant Mount Outdoor Dome Housing with Sunshield, Tinted Bubble 6.5", 24VAC
	74149 / KBD-2	System Keyboard with 3-Axis Joystick and Jog Shuttle, 12VDC
	74154 / EDC-IDFSW	Flush Mount Dome Housing, White Trimring Smoked Bubble 6.8"
	70449 / NE-128	Voltage supply unit 230V/24V-5A, IP66
	211360 / EDC-OPX/ HD-SDI	Connection cable Fastrax HDD-2030PTZ1080 in In/Outdoor Housing

HDD-2030PTZ1080

Technical Drawing

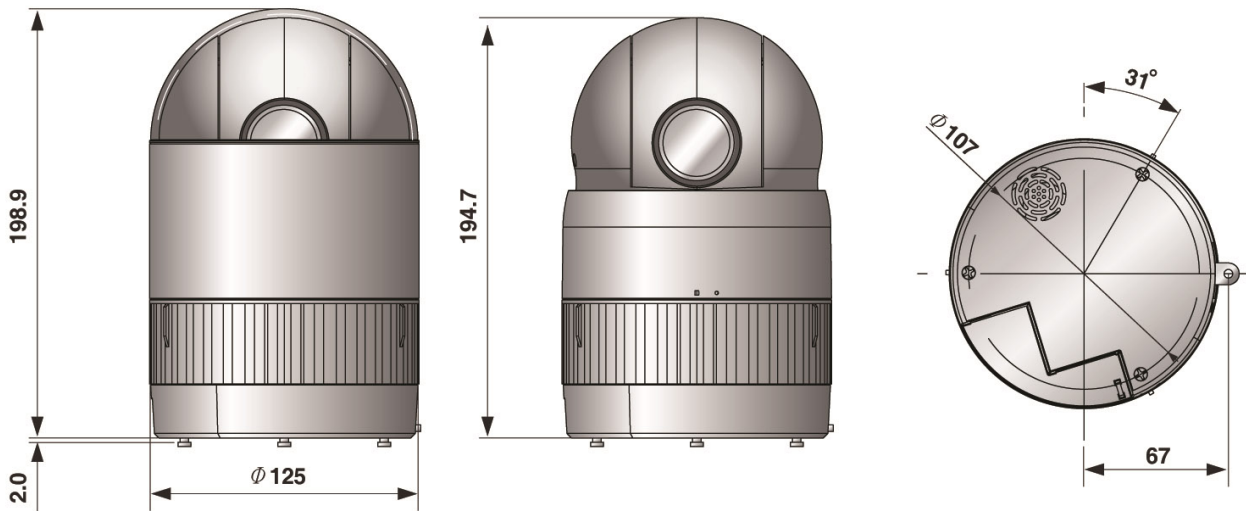

Your Contact Person



eneo is a registered trademark of
VIDEOR E. Hartig GmbH
Carl-Zeiss-Straße 8
63322 Rödermark
Deutschland
Tel.: +49 6074-888-333
E-Mail: info@eneo-security.com
Web: www.eneo-security.com