



NXD-880F37P

Article number: 211499

1/2,8" Network Dome, PoE, 1920x1080, ONVIF, Day&Night, 3,7mm, Indoor

Mainfeatures

1/2.8" 2.0 MP Progressive Scan CMOS-Sensor

Triple Streaming (H.264, MPEG4, MJPEG)

BLC (Back Light Compensation)

Web Casting

Privacy Masking, Password Protection

OpenVPN Support

Resolution max. 1920x1080 (Full HD)

Noise Reduction (2D-DNR)

Auto Exposure (AE)

Auto White Balance (AWB)

Framerate increase on motion detection

Specifications

Sensor size	1/2.8"
Resolution standard	HD 1080p
Imager	CMOS
Imager	Sony Exmor
System	electronic Day&Night
Sensitivity	0,2 Lux
Low speed shutter	yes
Wide Dynamic Range (WDR)	no
Backlight compensation	BLC
IR cut filter	standard
White balance	AWB
Stream types	2x H.264, 1x MJPEG multiple

NXD-880F37P

Specifications continued

Image transmission rate max.	30 fps
Multicast compliant	yes
Compression standard	H.264, MPEG-4, M-JPEG, JPEG
Lens type	fixed focal length
Focal length	3,7 mm
Digital zoom	yes
Iris control	no
Resolution	1920x1080 (16:9), 1280x1024 (5:4), 1280x720 (16:9), 704x576 (4:3), 704x480 (4:3), 640x480 (4:3), 352x288 (4:3), 352:240 (4:3), 320x240 (4:3)
Resolution max.	1920x1080
Horizontal angle of view	90 °
Motion detector	yes
Analysis functions	motion detection
Alarm processing	SD-card recording, FTP, E-Mail, HTTP, HTTP/XML, Boost
Audio support	no
Password protection	administrator, manager and users
e-PTZ support	EPTZ (digital PTZ)
Internal storage	microSDHC card, 32GB
Menu languages	German, French, Russian, Chinese, Korean, English
Privacy zones masking	8 zones masking
Remote configuration	web browser
Web browser	MS Internet Explorer vers. 7.0 or higher, Mozilla Firefox (Java), Google Chrome (Java), Safari (Java)
Mirror function	yes
Digital Noise Reduction (DNR)	2D-DNR
Digital Noise Reduction (DNR)	yes
Network connection	RJ-45
Network protocols	IPv4, IPv6, TCP, UDP, HTTP, HTTPS, RTP, RTSP, NTP, DHCP, SMTP, DDNS, RTCP, FTP, NFS, CIFS, UPnP, Zeroconf, Bonjour, SSL, OpenVPN, NAT
External connections	voltage input
Ethernet interface	100Base-TX
Alarm inputs	1
Alarm outputs	1
Series	eneo Economy Class
Dimensions (HxWxD)	55x115mm
Colour (housing)	white
Colour (bubble)	clear
Housing	indoor
Housing material	plastic
Weight	235g
Heater	no
Power consumption	4.5W
Blower	no
Mounting	wall mount, ceiling mount

NXD-880F37P

Specifications continued

ONVIF	yes, Profile S
Power over Ethernet	yes
Power over Ethernet	IEEE 802.3af
Window heater	no
SDK	upon request
Supply voltage	PoE, 12VDC
Temperature range (operation)	-10°C ~ +45°C
Text display	supplied
Vandalism resistant	no
Certificates	CE
Parts supplied	mounting accessories, installation CD, drilling template, Quick Installation Guide, Manual and Software on CD-ROM
Firmware update	via network


NXD-880F37P

Available Accessories


Bild	Art. Nr. / Bezeichnung	Beschreibung
	210144 / eneo Scan Device	Management program for eneo IP Cameras
	211974 / ENX-900P	PoE Extender, RJ45, Indoor, up to 100m, Gigabit Ethernet, Half/Full Duplex
	211976 / ECB-1	Media Converter, Indoor, 1x RJ45, 1x SFP
	211979 / ENI-900P	PoE Injector, Gigabit, Indoor, PoE+, RJ45
	211980 / EVX-900R	Media Converter, Indoor, Transmitter-Receiver, 1x RJ45, 1x RJ-11, 12V, up to 1000m
	211981 / EVX-900B	Media Converter, indoor, Transmitter-Receiver, 1x RJ45, 1x BNC, 12V, up to 1000m
	211982 / EPS-1008	PoE Switch, 8x PoE+, 1x RJ45, 1x SFP, 130W, Metal Housing
	211983 / EPS-1016	PoE Switch, 16x PoE+, 2x RJ45, 2x SFP, 250W, 19" Rack

NXD-880F37P


Technical Drawing

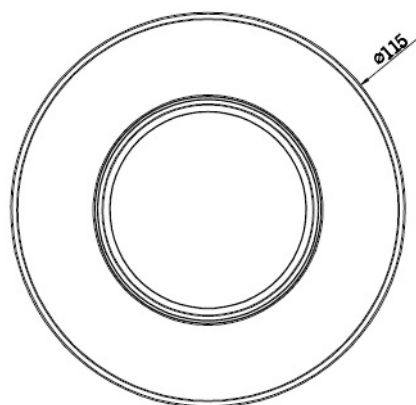

Top View

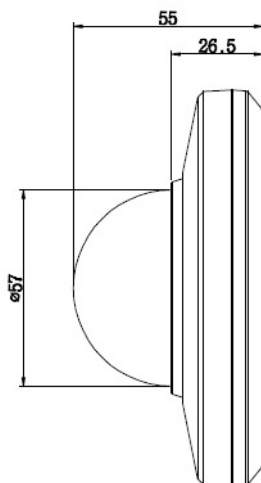

Side View

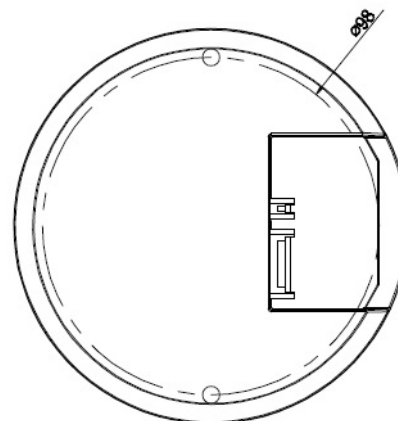

Bottom View

Maße/Dimensions: mm

Your Contact Person



eneo is a registered trademark of
VIDEOR E. Hartig GmbH
Carl-Zeiss-Straße 8
63322 Rödermark
Deutschland
Tel.: +49 6074-888-333
E-Mail: info@eneo-security.com
Web: www.eneo-security.com