

FT120DB / FT220DB / FT420DB / FT820DB

10-bit Digital 1 / 2 / 4 / 8-ch Video with 2-ch Bi-directional Data



Features

Video

- ▶ NTSC or PAL video standards supported
- ▶ Non-compressed 10-bit digitally encoded video
- ▶ No video degradation over the maximum operating distance

Data

- ▶ Meets EIA RS-232/422/485 specifications
- ▶ Full RS-485 Tri-state support
- ▶ Half or full-duplex operation
- ▶ Transparent to data encoding
- ▶ Data rates from 0 to 256kbps

Optical

- ▶ One fiber design
- ▶ High performance laser-based optics
- ▶ Multimode or Singlemode
- ▶ ST or FC connectors available

Robust Design

- ▶ Plug-and-Play design, no in-field adjustments required.
- ▶ Hot-swappable design
- ▶ Wide operating temperature range of -40°C to +75°C
- ▶ Designed for use in harsh environments

Warranty


- ▶ Comprehensive Lifetime Warranty

Description

The FT120DB/FT220DB/FT420DB/NFT820DB 10-Bit Digital Video and Data transmission products, support fiber optical transmission of 10-Bit PCM coded video (up to 8 channels) with two bi-directional data and features high-performance laser-based optics for the clearest, most reliable data transmission in both single and multi-mode with no video degradation over the entire operating distance (up to 20 km).

This plug-and-play product provides instant product compatibility for most major security manufacturers' equipment and reliability in harsh environments, a perfect compliment to any commercial, government or intelligent transportation application. The product features in card module or standalone type.

Typical Application

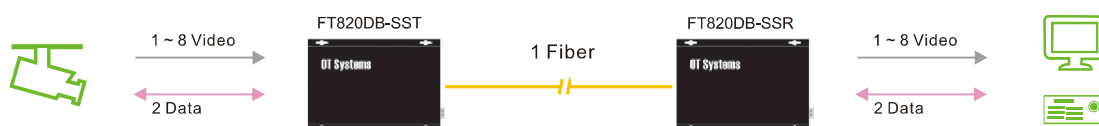

Specifications

Video

Number of Channels	1 / 2 / 4 / 8
Format	NTSC/PAL/SECAM
Input/Output	1 Volt pk-pk (75 ohms)
Bandwidth	>=6MHz
Differential Gain	<1% Typical
Differential Phase	<1 Degree Typical
SNR-CCIR weighted	>65dB

Data

Number of Channels	2
Data Direction	Bi-directional
Data Interface	RS232, RS422, RS485 2 or 4-wire Tri-state
Selection Method	DIP switch-selectable
Data Rate	0-256kbps
Data Format	MPD (Manchester, Bi-phase, etc)

LED

Video Signal Indication (Presence)	Green LED lit
Data In / Out	Red/Green LED lit
Optical Carrier Detected	Yellow / Active
Power	Red/On

Connectors

Video Input / Output	BNC
Optical Input / Output	ST (standard), FC (optional)
Data Input / Output Connectors	7-pin screw terminals
Power (Standalone)	2-pin screw terminals
Power (Rack-Mount)	Bus connector

Electrical and Mechanical

FT120DB

Power (Standalone)	12VDC @ 5.4W
Power (Rack Mount)	From FT-C18 Chassis
Dimensions(WxHxD) (Standalone)	156 x 30.5 x 223mm(Max)
Dimensions(WxHxD) (Rack Mount)	148 x 20.4 x 213mm(Max)
Shipping Weight (Standalone)	0.76kg
Shipping Weight (Rack Mount)	0.3kg

FT220DB / FT420DB

Power (Standalone)	12VDC @ 5.4W
Power (Rack Mount)	From FT-C18 Chassis
Dimensions(WxHxD) (Standalone)	156 x 50.5 x 223mm(Max)
Dimensions(WxHxD) (Rack Mount)	148 x 41.4 x 213mm(Max)
Shipping Weight (Standalone)	0.8kg (Max)
Shipping Weight (Rack Mount)	0.32kg (Max)

FT820DB

Power (Standalone)	12VDC @ 6.6W
Power (Rack Mount)	From FT-C18 Chassis
Dimensions(WxHxD) (Standalone)	156 x 50.5 x 223mm(Max)
Dimensions(WxHxD) (Rack Mount)	148 x 41.4 x 213mm(Max)
Shipping Weight (Standalone)	0.82kg
Shipping Weight (Rack Mount)	0.35kg

Environmental

Operating Temp	-40°C to +75°C
Storage Temp	-40°C to +85°C
Relative Humidity	0 to 95% non-condensing
MTBF	> 100,000 hours

Ordering Information

Fiber Type	Part Number	Description	Wavelengths (nm)	Optical Power Budget (dB)	Max. Distance (Km)	No. of slots
Multi-mode (62.5/125µm)	FT120DB-SMT FT120DB-SMR	1- ch Video Transmitter / Receiver with 2-ch bidirectional Data Transceiver	1310 1550	23	4	1
	FT220DB-SMT FT220DB-SMR	2- ch Video Transmitter / Receiver with 2-ch bidirectional Data Transceiver	1310 1550	23	2	2
	FT420DB-SMT FT420DB-SMR	4- ch Video Transmitter / Receiver with 2-ch bidirectional Data Transceiver	1310 1550	23	2	2
	FT820DB-SMT FT820DB-SMR	8- ch Video Transmitter / Receiver with 2-ch bidirectional Data Transceiver	1310 1550	23	1	2
Single-mode (9/125µm)	FT120DB-SST FT120DB-SSR	1- ch Video Transmitter / Receiver with 2-ch bidirectional Data Transceiver	1310 1550	17	20	1
	FT220DB-SST FT220DB-SSR	2- ch Video Transmitter / Receiver with 2-ch bidirectional Data Transceiver	1310 1550	17	20	2
	FT420DB-SST FT420DB-SSR	4- ch Video Transmitter / Receiver with 2-ch bidirectional Data Transceiver	1310 1550	17	20	2
	FT820DB-SST FT820DB-SSR	8- ch Video Transmitter / Receiver with 2-ch bidirectional Data Transceiver	1310 1550	17	20	2

- Options
- ST type connector is standard. For FC type, specify "F" in the suffix. E.g. FMT.
 - For Standalone type, please add "SA". E.g. SMTSA
 - Please feel free to consult factory if longer transmission distance is required.
- Power Adaptor
- Power adaptor is included in Standalone type only.
- Rack Mount Chassis
- FT-C18 is to be purchased separately. Please refer to accessories section for the details.

- Notes:
- Transmission distance will suffer if additional losses are introduced by the optical connectors, fusions, splices and the fibers within the network.
 - Operating distance of multimode is limited by the characteristics of the fiber bandwidth.
 - Power adaptor is manufactured by third party and is supplied with fitted screw - terminal output cables.
 - Please feel free to consult factory for any special requirement and customization.



OT Systems Ltd., June 2013

Due to continuous improvement, all product specifications are subject to change without further notice.