

SQ-22



A reliable and affordable 22” surveillance display with Full HD resolution and versatile inputs ideal for security and control centre environments.

Built on an LED-backlit 22”widescreen display the SQ-22 presents high picture clarity while delivering 1920 x 1080 Full HD resolution. Looping BNC video inputs and NTSC/PAL support maximise flexibility for system integration. Surveillance efficiency is improved thanks to Anti-Burn-in™ technology, quick signal-switching, rapid response time and auto setting adjustment. And with built-in speakers, slim profile and VESA mountability, the SQ-22 is ideal for budget-friendly security and control centre environments.

- > FHD 1920 × 1080 resolution
- > Anti-Burn-in™ technology
- > Built-in Image Enhancer: 3D Comb Filter/Deinterlace/Noise Reduction
- > Versatile connectivity (BNC in/out, VGA, HDMI, Audio in/out)
- > Looping BNC video inputs for multiple connections
- > Quick signal-switching time (≤ 0.8 sec.)
- > NTSC/PAL auto-detection
- > Selectable signal source
- > PC compatible
- > Built-in speakers
- > Key lock function
- > Auto-adjustment for optimal settings
- > Security socket
- > VESA standard wall mount
- > Tilt capacity from -5° ~ 15°



SQ-22

Specifications

SQ-22


Panel	Panel Type	LED-Backlit TFT LCD
	Panel Size	21.5"
	Max. Resolution	1920 x 1080
	Pixel Pitch	0.247 mm
	Brightness	250 cd/m ² (Typical)
	Contrast Ratio	2,000,000 : 1 (DCR)
	Viewing Angle(H/V)	170°/160°
	Display Colour	16.7 M
	Response Time	3 ms (GTG)
Horizontal Resolution	TV Lines	600TVL (NTSC/PAL)
Frequency (H/V)	H.Freq	30 kHz – 80 kHz
	V.Freq	50 Hz – 76 Hz
Input	VGA	15-Pin D-Sub
	HDMI	HDMI
	CVBS	BNC x 1
Output	CVBS	BNC x 1
Audio	Audio In	3.5 Ø mm audio jack RCA L+R for video
	Audio Out Speaker	3.5 Ø mm audio jack 2W x 2
Power	Power Supply	External
	Power Requirements	DC12V
	Consumption	30W (On)
		0.5W (Standby) 0.5W (Off)
Plug and Play	VESA	EDID
Operating Conditions	Temperature	5°C ~ 35°C (41°F ~ 95°F)
	Humidity	20%~85%
Storage Conditions	Temperature	-20°C ~ 60°C (-4°F ~ 140°F)
	Humidity	5%~85%
Mounting	VESA FPM PMI	Yes (100 x 100mm)
Tilt	Tile	-5° ~ 15°
Dimensions	Product (W x D x H)	511 x 183 x 377 mm (20.1" x 7.2" x 14.8")
	Packaging (W x D x H)	561 x 103 x 426 mm (22.1" x 4.1" x 16.8")
Weight	Product Weight (with base)	3.2 kg (7.1 lbs)
	Packaging weight	4.6 kg (10.1 lbs)
Regulation Approval	Certifications & Compliance	CE, FCC, CCC, CEL, RoHS, WEEE
Accessories	Supplied	User manual, power cord, 15-Pin D-Sub cable, audio cable, warranty card



Stylish and slim design ideal for professional security environments



Built-in speakers enable more rigorous security monitoring

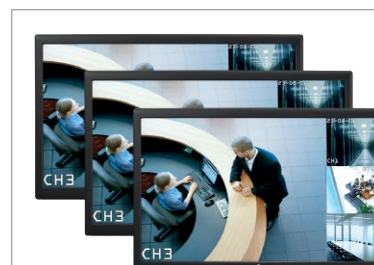

Looping BNC, video inputs allow multiple display connections



Video versatility, including VGA, HDMI, and BNC In/Out