

DF-55



MVA
LED

A 23.4mm slim profile display set with dual-sided 55" panels and a movable stand, designed specifically for professional digital signage applications.

Featuring Full HD resolution, 700 nits of brightness and a 3000:1 contrast ratio, the DF-55 is capable of delivering crisp images in diverse indoor environments. Dual HDMI connections make it easy for IPC or media player integration and allow displaying individual contents on each screen. With the metal housing and the movable floor stand, the DF-55 is ideal for public environments.


- > 55" dual-sided LCD signage
- > 23.4mm slim profile
- > FHD 1920 x 1080 resolution
- > 700 nits (front) / 700 nits (back) of brightness fulfills diverse indoor surrounding requirements
- > 3000:1 contrast ratio
- > Dual HDMI connections for connecting media players/ IPC
- > Separately driven display contents on each screen
- > Free standing and movable floor stand on removable casters
- > Durable metal housing
- > Available in black and white

DF-55

Specifications

DF-55

Panel	Panel Type	LED-Backlit TFT LCD (MVA Panel)
	Panel Size	55"
	Max. Resolution	1920 x 1080 (FHD)
	Pixel Pitch (H x W)	0.63 x 0.63 mm
	Brightness	700/700 nits
	Contrast Ratio	3000:1
	Viewing Angle	178
	Viewable Size (H x V)	1209.6 x 680.4 mm
	Display Colour	10.7B
	Response Time (GTG)	6.5 ms
	Colour Gamut	72 (%)
	Surface Treatment	Haze 11%, 3H
Input	HDMI	HDMI x 2 (With HDCP)
Power	Power Supply	AC 110 ~ 240V, 50/60Hz
	Power Consumption	230 W (Typical)
	Light source	LED
Operating Conditions	Temperature	0°C ~ 40°C (32°F~104°F)
	Humidity	20%~80% (No condensation)
Storage Conditions	Temperature	-10°C ~ 50°C (14°F~122°F)
	Humidity	20%~80% (No condensation)
Dimensions	Display (H x W x U/D)	2029.7 x 861.9 x 23.4/ 62.4 mm, (79.91 x 33.93 x 0.92/ 2.46 in)
	Bezel (U/L/R)	64.2/87.2/87.2 mm (2.53/3.43/3.43 in)
	Base (Top view)	452.4 x 952.7 mm (17.81 x 37.5 in)
	Packing (W x H x D)	
	Box1	1609 x 968 x 176 mm (63.35 x 38.11 x 6.93 in)
Box2	1068 x 735 x 400 mm (42.05 x 28.94 x 15.75 in)	
Weight	Net	94.5 kg (207.9 lb)
	Gross	
	Box1	48 kg (105.82 lb)
Box2	62 kg (136.69 lb)	
Regulation Approval	Certifications & Compliance	CB, CE, FCC, RoHS, WEEE, REACH
Accessories	Supplied	Power cable 110~240V x1
	Optional	IPC

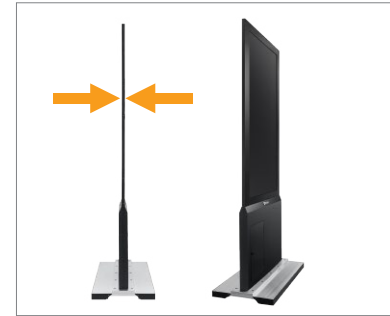

23.4mm amazing slim profile



Free standing and movable floor stand on removable casters



HDMI connections for connecting media players/ IPC



Durable metal housing

