



FXC-1302/W

Article-No.: 92714

1/3" Network Camera,
Day&Night, H.264, WiFi,
1600x1200, 12VDC, PoE, ONVIF

Mainfeatures

1/3" 2 megapixels CMOS sensor
Simultaneous video streaming (H.264/MJPEG/MPEG-4)
e-PTZ function
Integrated motion detection
Alarm recording (Mini SD, NAS, ISCSI)
Power-over-Ethernet (PoE), WiFi function

Resolution of 1600 x 1200 (HD 720p) max.
Electronic day&night switching
Privacy zone masking
Internal microphone and speaker
ONVIF conformity
Client management software included



Specifications

Series	eneo F
Resolution standard	HD 720p
System	electronic Day&Night
Sensor size	1/3"
Imager	CMOS
Sensitivity	0,5 Lux
Sensitivity	at F1.2
Digital Noise Reduction (DNR)	no
Low speed shutter	yes
Low speed shutter	1/25sec. ~1/100,000sec.
Backlight compensation	no
Wide Dynamic Range (WDR)	no
IR cut filter	OLPF (Overlay Low Pass Filter)
Privacy zones masking	4 areas selectable
Activity detection	yes
Motion detector	integrated


Specifications (continued)

Text display	supplied
Menu languages	English, Chinese
Audio support	yes
Audio	Built-in microphone, speaker
Alarm inputs	no
Alarm outputs	no
Internal storage	microSD card, SDHC card, SD card
Resolution max.	1600x1200
Resolution	1600x1200 (4:3), 1600x912 (16:9), 1280x960 (4:3), 1280x720 (16:9), 800x600 (4:3), 704x576 (4:3), 640x480 (4:3), 352x288 (4:3)
Image transmission rate max.	30 fps
Ethernet interface	100Base-TX, Wireless LAN (IEEE 802.11)
Web browser	MS Internet Explorer vers. 7.0 or higher
Network protocols	TCP/IP, HTTP, DHCP, DNS, DDNS, RTP, RTCP, PPPoE, FTP, SMTP, NTP, SNMP, HTTPS, SIP, IPv4, IPv6
Stream types	H.264, MJPEG multiple
Multicast compliant	yes
Lens type	fixed focal length
Focal length	4 mm
Digital zoom	no
Serial interfaces	no
Remote configuration	web browser, remote software
Password protection	yes
e-PTZ support	yes
Supply voltage	12VDC, PoE
Power consumption	3W
Temperature range (operation)	-10°C ~ +60°C
Colour (housing)	RAL9010
Housing material	plastic
Housing	indoor
Protection rating	n/a
Integrated wall mount	yes
Hidden cable management	no
Window heater	no
Vandalism resistant	no
Management Software Support	Finitra
SDK	available, SDK incl. HTTP-API and ActiveX
ONVIF	yes, ONVIF Test Tool version 1.02.2.10
Dimensions (HxWxD)	110x70x33 mm
Weight	250 g
Parts supplied	lens, Quick Installation Guide, Manual and Software on CD-ROM, installation CD, screw set, feet, PSU

Optional Accessories

Image	Article ID / type	Description
	FNR-4004/500	Network Video Recorder, 4xIP, 1600x1200 (@ 2 Channels), H.264, 500GB, 12VDC
	FNR-4016/500	Network Video Recorder, 16xIP, 1600x1200 (@4 Channels), H.264, 500GB, 230VAC

Technical Drawing

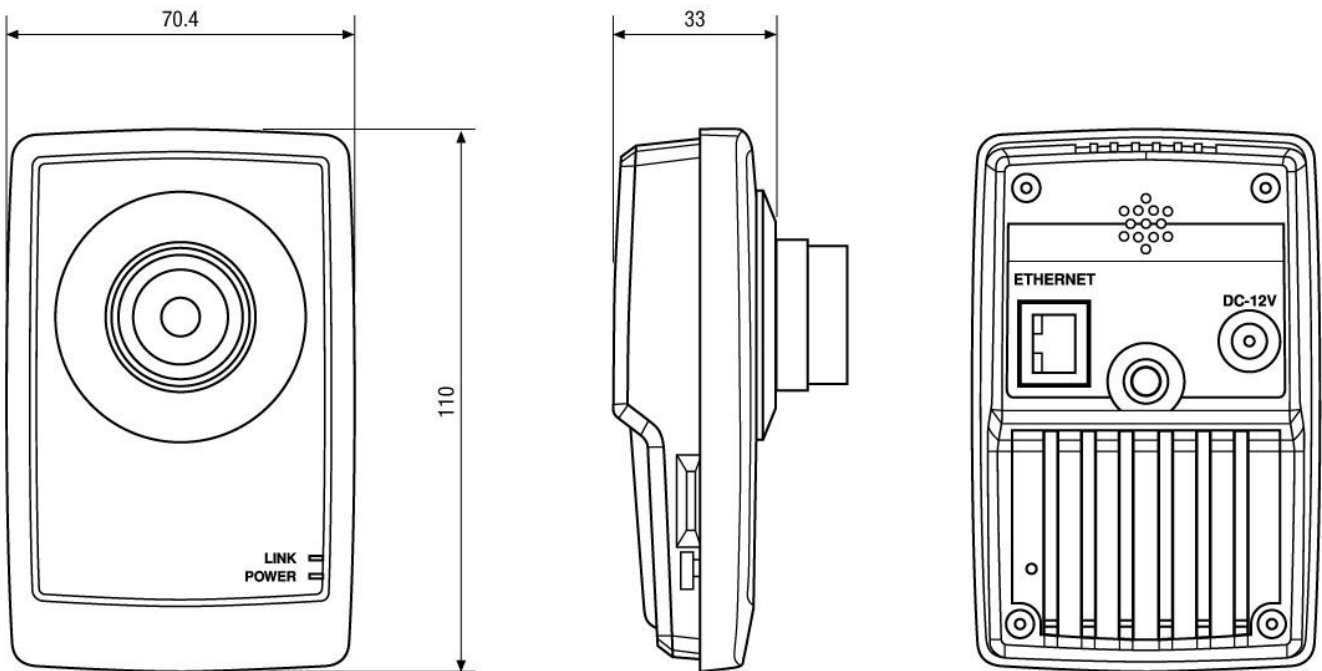

Maße/Dimensions: mm



Your partner for eneo products:

